


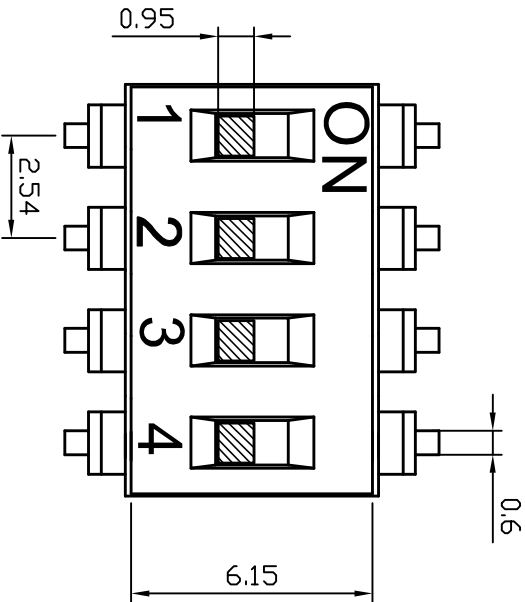


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

1	2	3	4	5	6	7	8	9	10
Poles(N)		A(mm)							
01	02	03	04	05	06	07	08	09	10
2.54	5.08	7.62	10.16	12.70	15.24	17.78	20.32	22.86	25.40
		30.48							

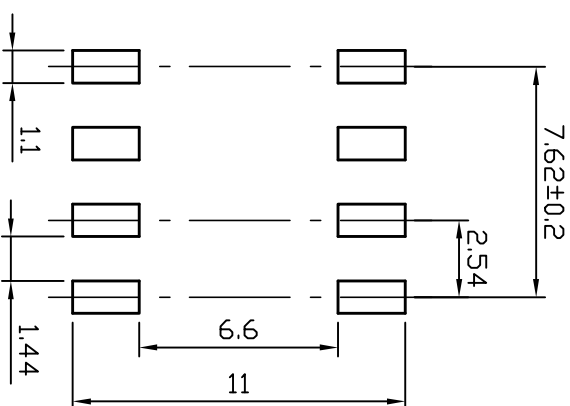

CIRCUIT

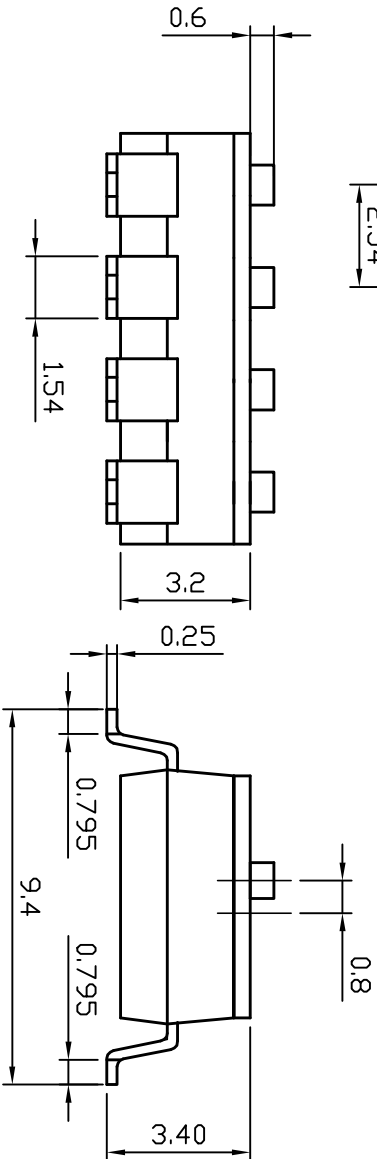

P.C.B LAYOUT

SPECIFICATIONS:

Operating temperature range: -30℃to+85℃
Rating:25mA, 24V DC Max
Insulation resistance:100MΩ min, 500V DC
Dielectric strength:500V AC for 1min
Contact resistance:100mΩ Max
Life:1, 000 Cycles
Operating force:1000gf Max



Rohs COMPLIANT Pb-Free RoHS Compliant				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	DIP Switch
UNLESS OTHERWISE STATED				WYJ	2025. 07. 25		
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	DHM50-DTS-04L-X
X.XX	±0.15	REV	A				
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3
△	±2°	SCALE	4:1			PRINT DATE	2025.07.26