


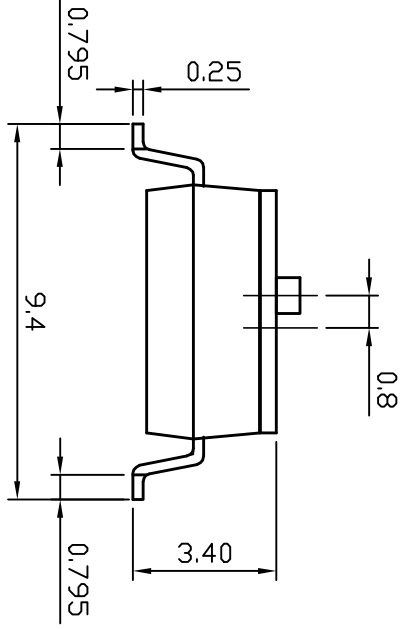
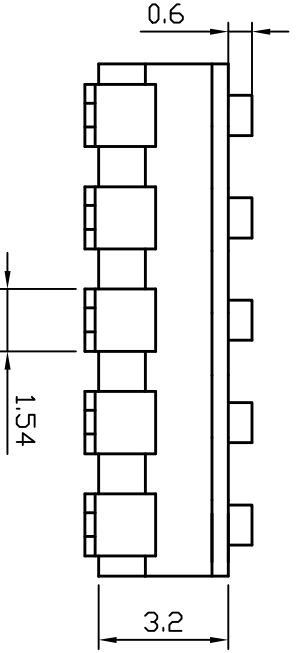


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

1		2	3	4	5	6	7	8	9	10
Poles(N)		A(mm)								
01		2.54								
02		5.08								
03		7.62								
04		10.16								
05		12.70								
06		15.24								
07		17.78								
08		20.32								
09		22.86								
10		25.40								
12		30.48								

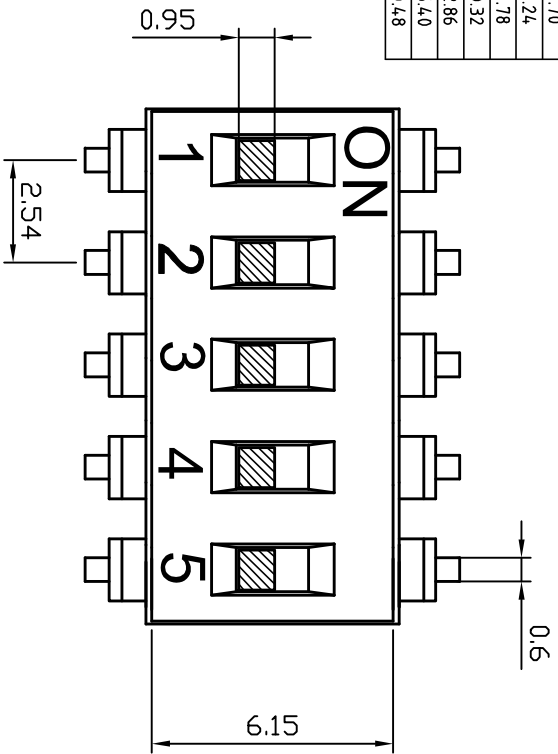

CIRCUIT

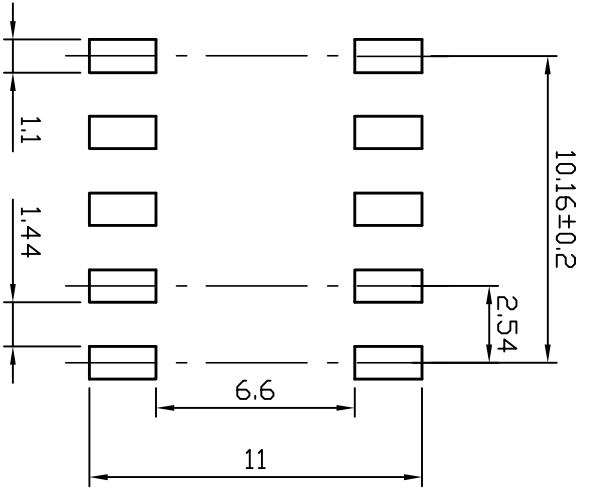

P.C.B. LAYOUT

SPECIFICATIONS:

Operating temperature range: -30℃to+85℃
Rating:25mA, 24V DC Max
Insulation resistance:100MΩ min, 500V DC
Dielectric strength:500V AC for 1min
Contact resistance:100mΩ Max
Life:1, 000 Cycles
Operating force:1000gf Max



RÖHS COMPLIANT Pb-Free RoHS Compliant				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	DIP Switch
UNLESS OTHERWISE STATED				CHKD	DATE	MODEL	DHM50-DTS-05L-X
X.X	±0.20	SIZE	A4		2025. 07. 26		
X.XX	±0.15	REV	A				
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3
△	±2°	SCALE	4:1			PRINT DATE	2025.07.26