


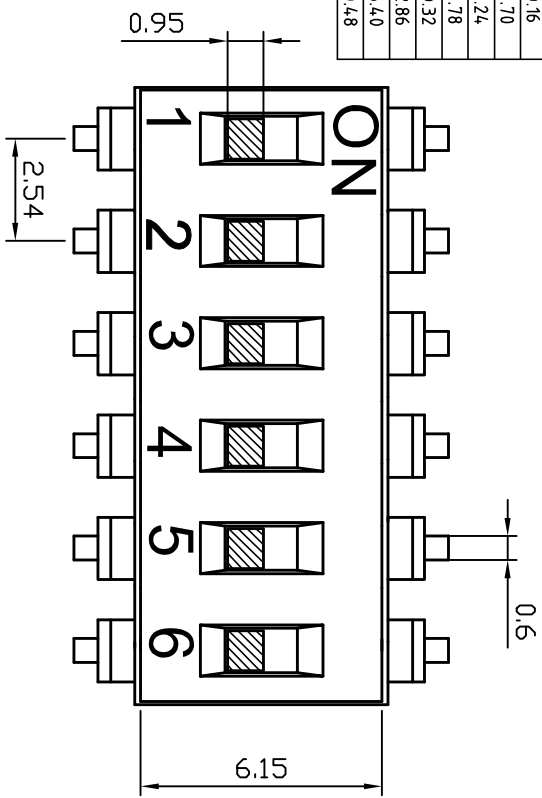


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

1	2	3	4	5	6	7	8	9	10
Poles(N)		A(mm)							
01	02	03	04	05	06	07	08	09	10
2.54	5.08	7.62	10.16	12.70	15.24	17.78	20.32	22.86	25.40
		30.48							

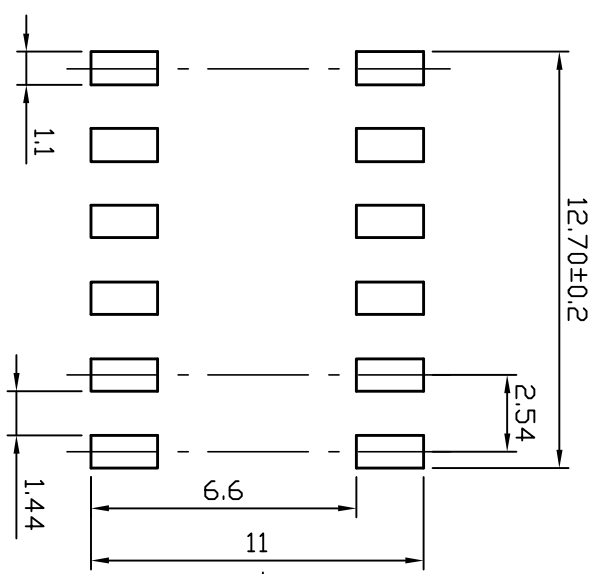

CIRCUIT

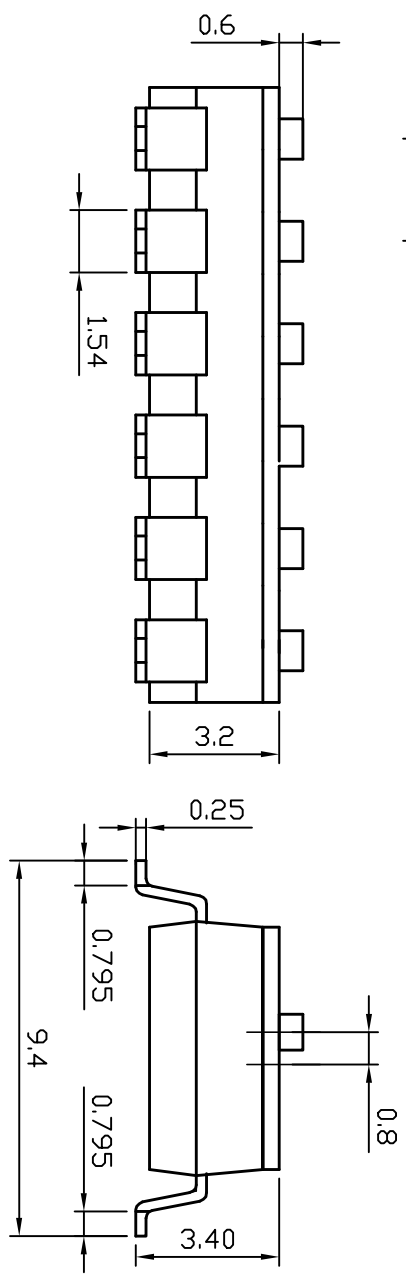

P.C.B LAYOUT

SPECIFICATIONS:

Operating temperature range: -30°C to +85°C
Rating: 25mA, 24V DC Max
Insulation resistance: 100MΩ min, 500V DC
Dielectric strength: 500V AC for 1min
Contact resistance: 100mΩ Max
Life: 1,000 Cycles
Operating force: 1000gf Max



ROHS COMPLIANT				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.							
TOLERANCE				DESIGN		DATE		TITLE		DIP Switch	
UNLESS OTHERWISE STATED				wyl		2025. 07. 26		DHM50-DTS-06L-X			
X.X	±0.20	SIZE	A4	CHKD		DATE		MODEL		DHM50-DTS-06L-X	
X.XX	±0.15	REV	A								
X.XXX	±0.10	UNIT	mm	APPD		DATE		SHEET		1/3	
	±2°	SCALE	4:1					PRINT DATE		2025.07.26	