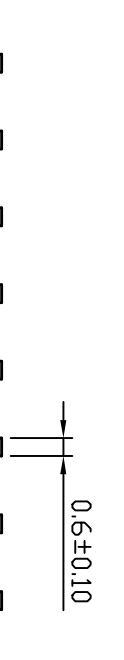



		1	2	3	4	5	6	7	8	9	10
Poles(N)		A(mm)									
A	01	2.54									
	02	5.08									
	03	7.62									
	04	10.16									
	05	12.70									
	06	15.24									
	07	17.78									
	08	20.32									
	09	22.86									
	10	25.40									
	12	30.48									
	B										

本公司智慧财产未经许可不得复制

ming biao copyright may not be used without permission from ming biao.

A

B

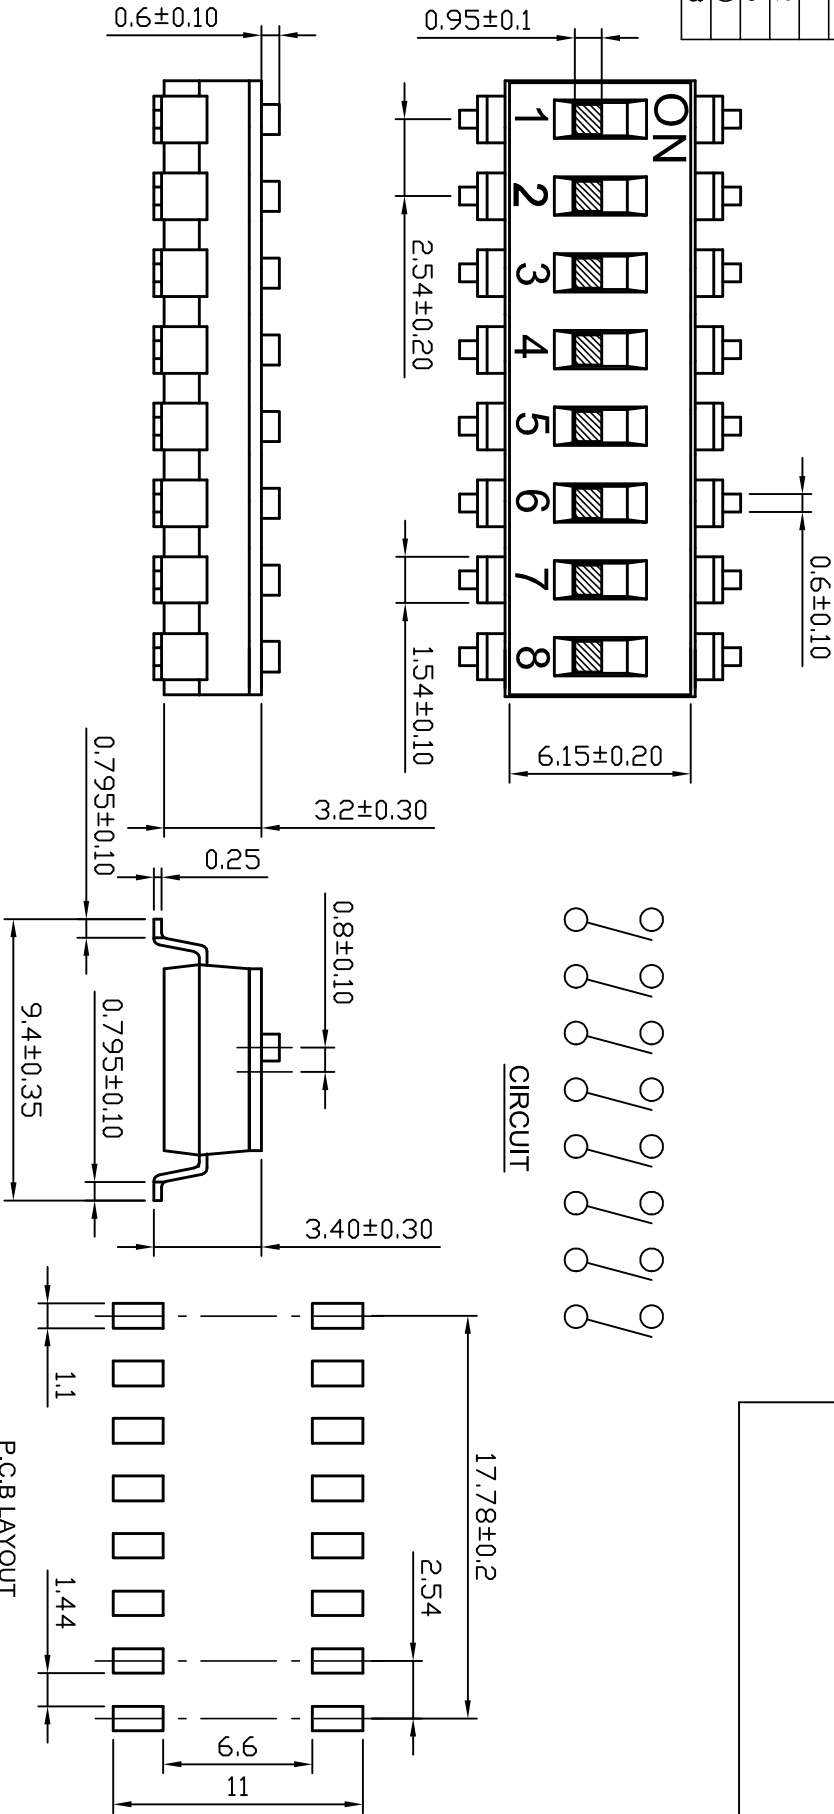

SPECIFICATIONS:

Operating temperature range: -30℃to+85℃
Rating: 25mA, 24V DC Max
Insulation resistance: 100MΩ min, 500V DC
Dielectric strength: 500V AC for 1min
Contact resistance: 100mΩ Max
Life: 1,000 Cycles
Operating force: 1000gf Max



RoHS COMPLIANT Pb-Free REACH				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	DIP Switch
UNLESS OTHERWISE STATED				WYJ	2025. 07. 26		
XX	±0.20	SIZE	A4	CHKD	DATE	MODEL	DHM50-DTS-08L-X
XXX	±0.15	REV	A				
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3
△	±2°	SCALE	3:1			PRINT DATE	2025.07.28
				PRINT DATE 2025.07.28			