


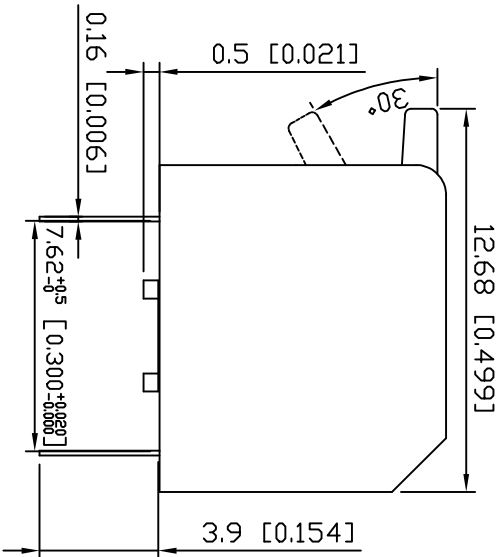
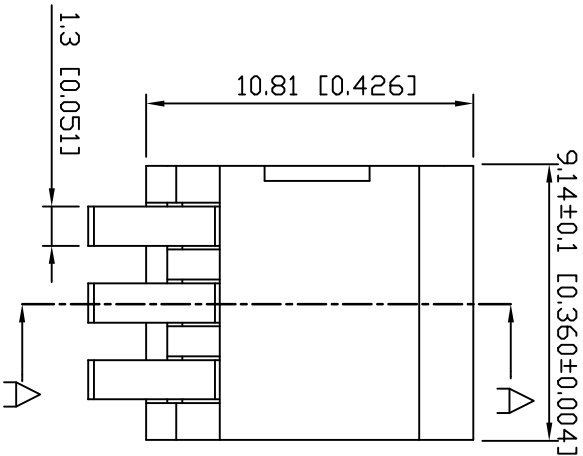


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao

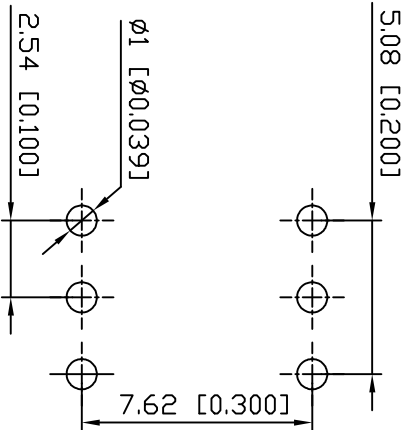

CIRCUIT

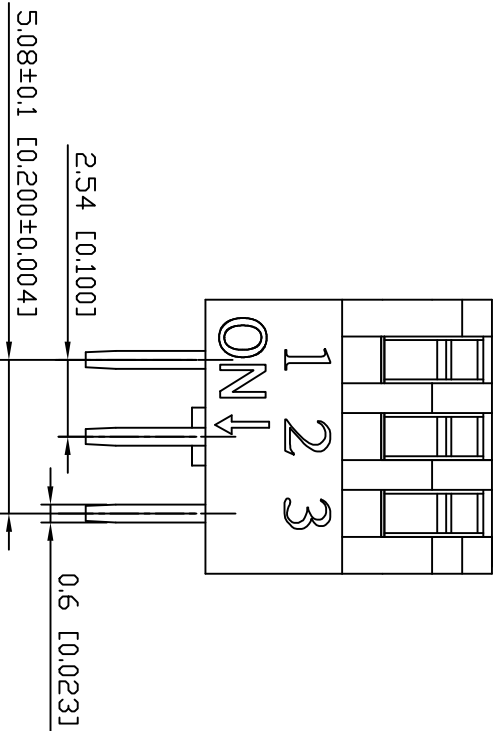

P.C.B LAYOUT

SPECIFICATIONS:

Operating temperature range: -20°C to +70°C
Rating: 25mA, 24V DC Max
Insulation resistance: 100MΩ min. 500V DC
Dielectric strength: 500V AC for 1min
Contact resistance: 50mΩ Max
Life: 3000 Cycles
Travel: 30°
Operating force: 200gf

东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.



2024.09.29

ISSUED



TOLERANCE				DESIGN	DATE	TITLE
UNLESS OTHERWISE STATED				WYJ	2024.09.29	侧拨式DIP开关
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL
X.XX	±0.15	REV	A			DHT11-DPL-03
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET
△	±2°	SCALE	2:1			PRINT DATE
						2025.02.28

