

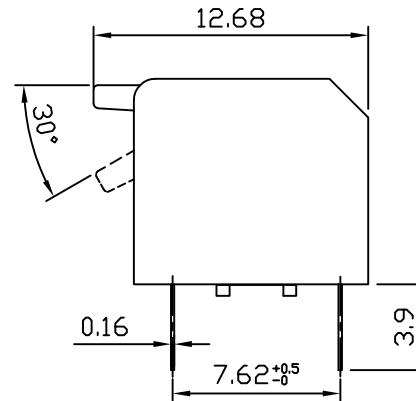
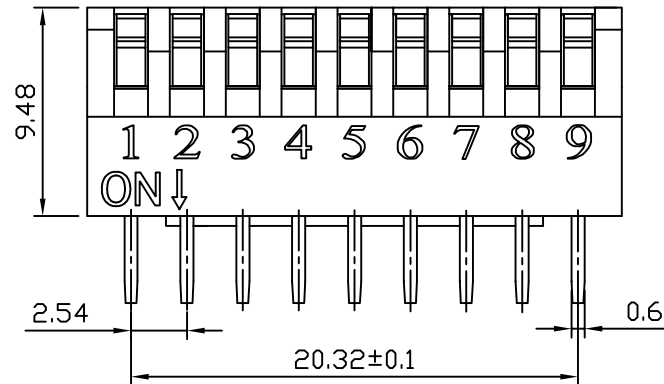

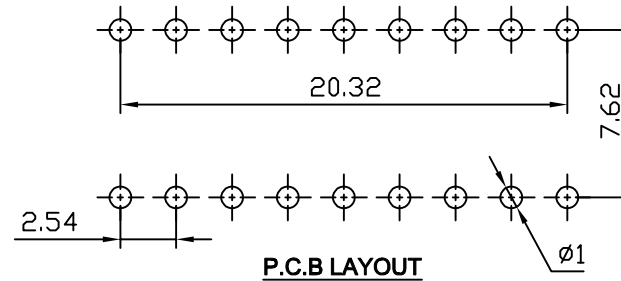



本公司智慧财产未经许可不得复制
ming biao copyright, may not be used without permission from ming biao.

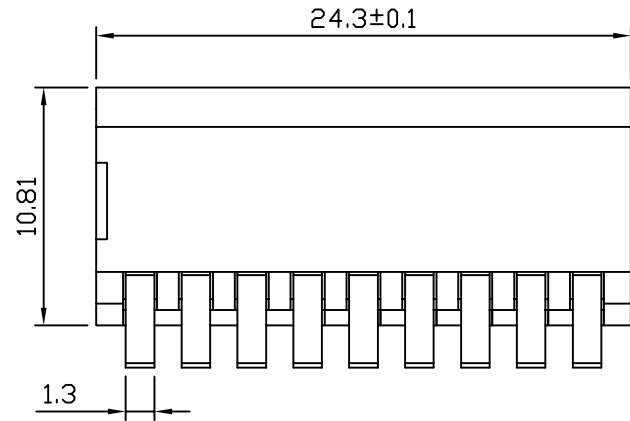

SPECIFICATIONS:

Operating temperature range: -20°C to +70°C
Rating: 100mA, 50V DC Max
Insulation resistance: 100MΩ min, 100V DC
Dielectric strength: 500V AC for 1Min
Contact resistance: 100mΩ Max
Life: 3,000 Cycles
Operating force: 200gf Max

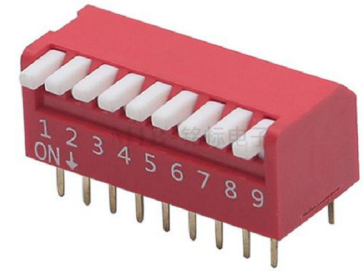

ROHS COMPLIANT Pb Pb-Free HF Halogen Free				 东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.				
TOLERANCE				DESIGN	DATE	TITLE	DIP Switch	
UNLESS OTHERWISE STATED				WYJ	2024. 06. 07			
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	DHT11-DPL-09	
X.XX	±0.15	REV	A					
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3	
	±2°	SCALE	3:1			PRINT DATE	2025.01.08	

