

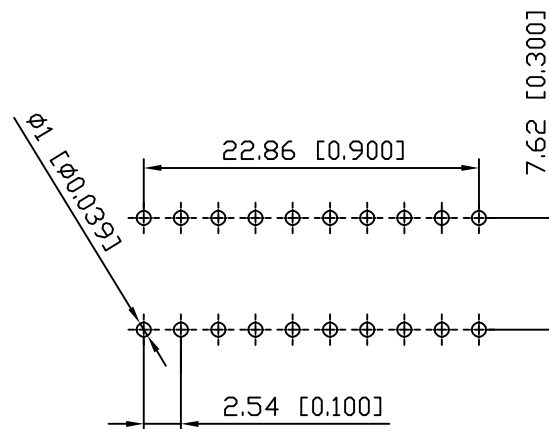
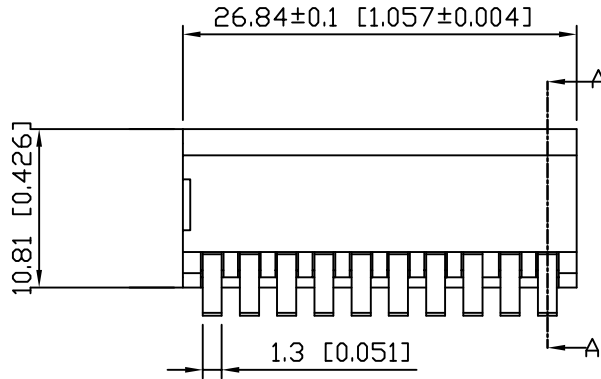




本公司智慧财产未经许可不得复制
ming biao copyright, may not be used without permission from ming biao.

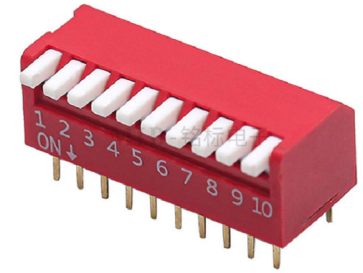

P.C.B LAYOUT



CIRCUIT

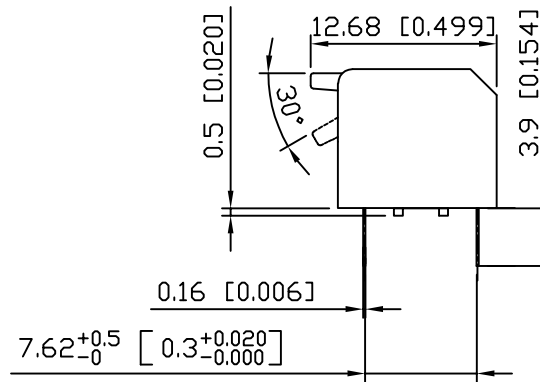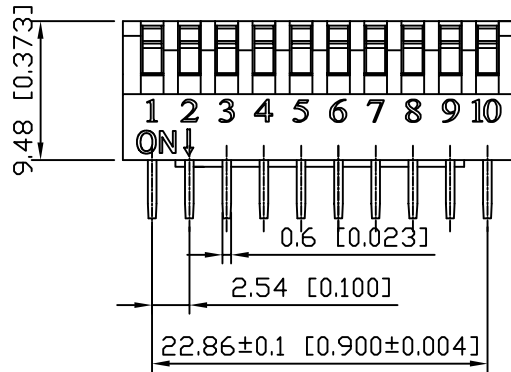

SPECIFICATIONS:

Operating temperature range: -20°C to +70°C
Rating: 25mA, 24V DC Max
Insulation resistance: 100MΩ min. 500V DC
Dielectric strength: 500V AC for 1Min
Contact resistance: 50mΩ Max
Life: 3000 Cycles
Travel: 30°
Operating force: 200gf



  				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.				
TOLERANCE				DESIGN	DATE	TITLE	侧拨式DIP开关	
UNLESS OTHERWISE STATED				WYJ	2024. 09. 29			
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	DHT11-DPL-10	
X.XX	±0.15	REV	A					
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3	
	±2°	SCALE	1:1			PRINT DATE	2025.01.08	