




本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao



L type

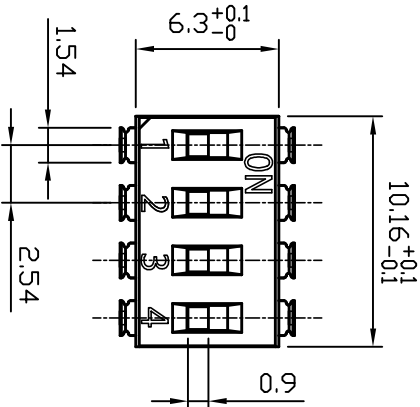

S type

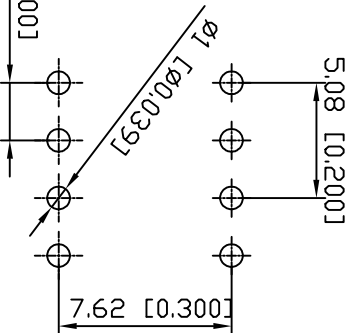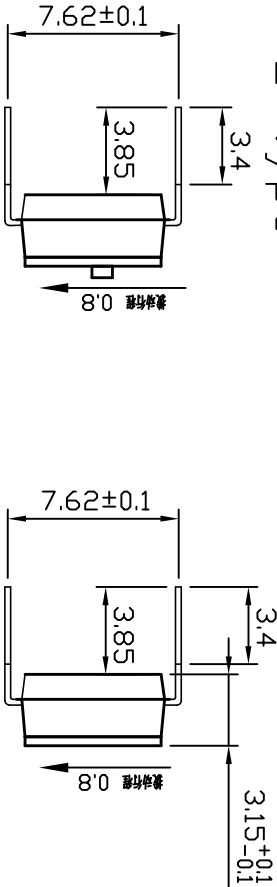

P.C.B LAYOUT

SPECIFICATIONS:
Operating temperature range: -30°C to +85°C
Rating: 100mA, 50V DC Max
Insulation resistance: 100MΩ min, 500V DC
Dielectric strength: 500V AC for 1Min
Contact resistance: 50mΩ Max
Life: 1000 Cycles
Travel: 0.8mm
Operating force: 80gf

材料

1. 底座: 工程塑料, 黑色
2. 上盖: 工程塑料, 黑色
3. 推钮: 工程塑料, 白色
4. 端子: 合金铜镀金



Rohs COMPLIANT Pb-Free RoHS Free				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE UNLESS OTHERWISE STATED				DESIGN	DATE	TITLE	直插式DIP开关
X.X	±0.20	SIZE	A4	CHKD	2024.09.29	MODEL	DHT60-DTH-04
X.XX	±0.15	REV	A	APPD	DATE	SHEET	1/3
X.XXX	±0.10	UNIT	mm		PRINT DATE	2025.03.26	
△	±2°	SCALE	1:1				