
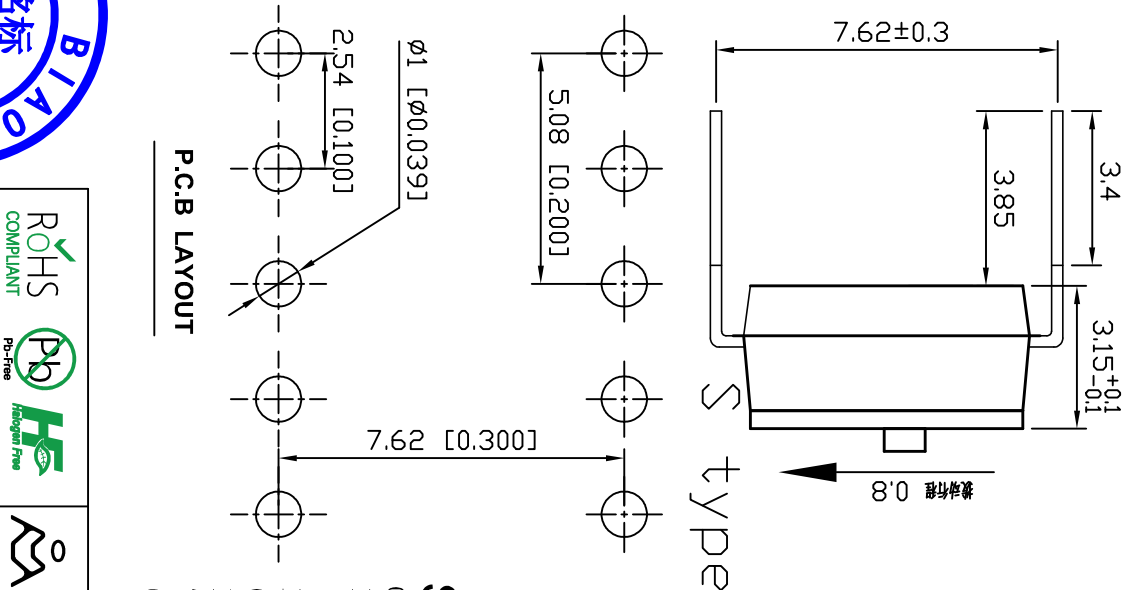


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

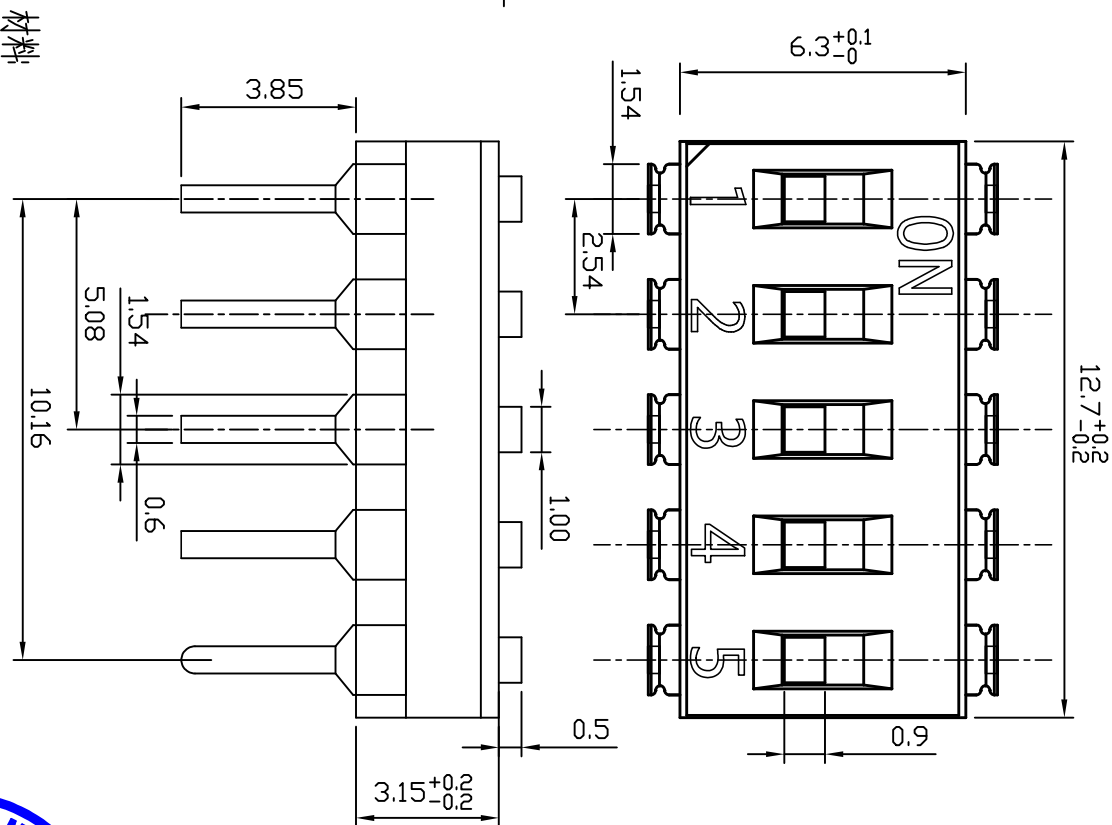

P.C.B LAYOUT

SPECIFICATIONS:
Operating temperature range: -30°C to +85°C
Rating: 100mA, 50V DC Max
Insulation resistance: 100MΩ min, 500V DC
Dielectric strength: 500V AC for 1Min
Contact resistance: 50mΩ Max
Life: 1000 Cycles
Travel: 0.8mm
Operating force: 80gf

材料

1. 底座: 工程塑料, 黑色
2. 上盖: 工程塑料, 黑色
3. 推钮: 工程塑料, 白色
4. 端子: 合金铜镀金



RÖHS COMPLIANT Pb-free RoHS Compliant				DESIGN DATE TITLE			
UNLESS OTHERWISE STATED				DATE TITLE			
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	DHT60-DTH-05
X.XX	±0.15	REV	A	APPD	DATE	SHEET	1/3
X.XXX	±0.10	UNIT	mm	SCALE	2:1	PRINT DATE	2025.03.26