


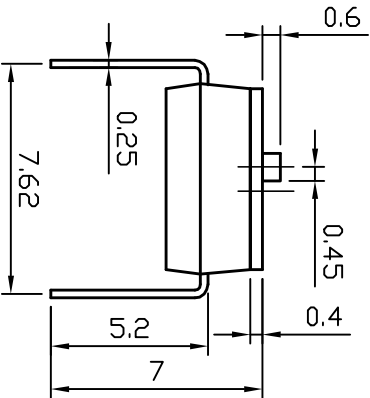
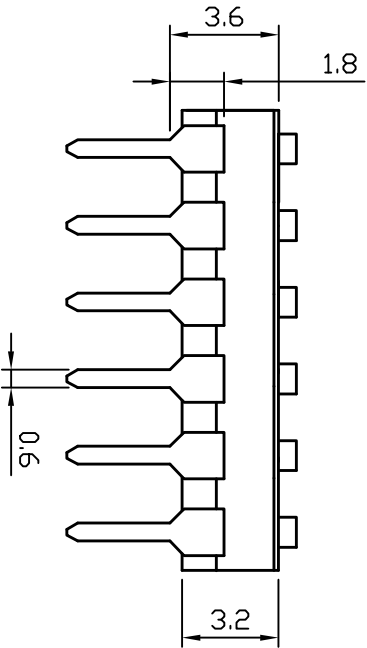


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao

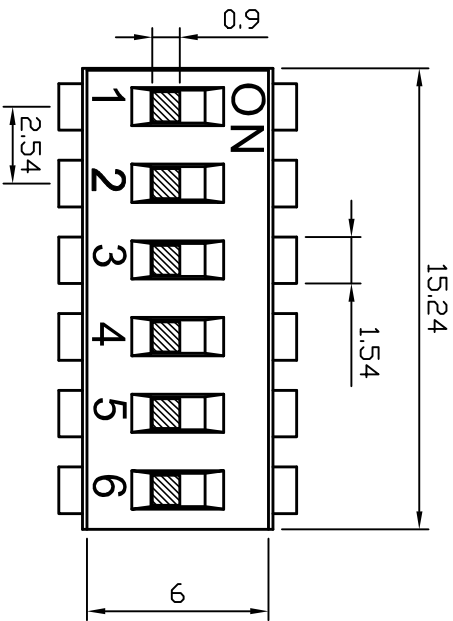

CIRCUIT

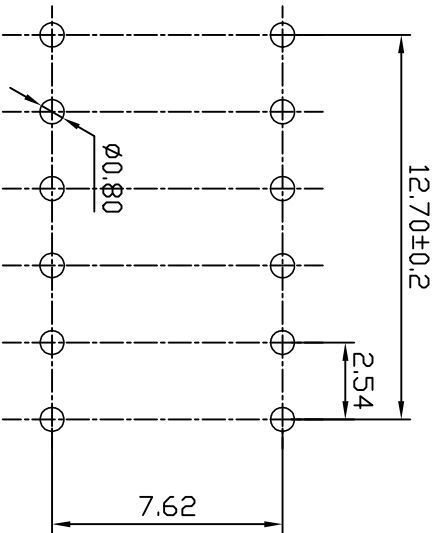

P.C.B LAYOUT

SPECIFICATIONS:

Operating temperature range: -30℃ to +85℃
Rating: 100mA, 50V DC Max
Insulation resistance: 100MΩ min, 500V DC
Dielectric strength: 500V AC for 1Min
Contact resistance: 100mΩ Max
Life: 1,000 Cycles
Travel: 0.45±0.05mm
Operating force: 1000gf Max



RoHS COMPLIANT Pb-free logo				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	DIP Switch
UNLESS OTHERWISE STATED				WYJ	2025. 09. 10		
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	DHT60-DTH-06L-X
X.XX	±0.15	REV	A				
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3
△	±2°	SCALE	4:1			PRINT DATE	2025.09.10