


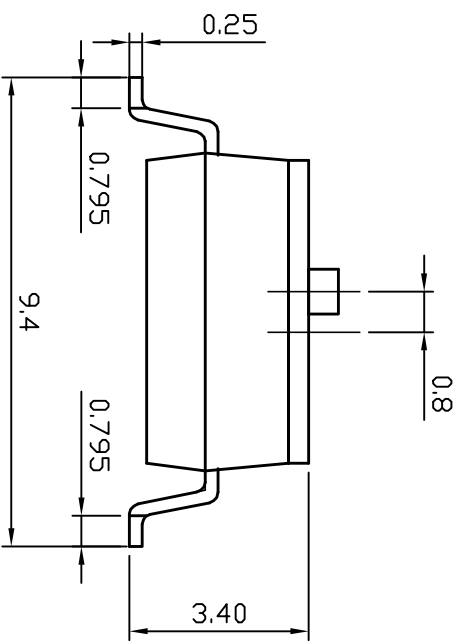
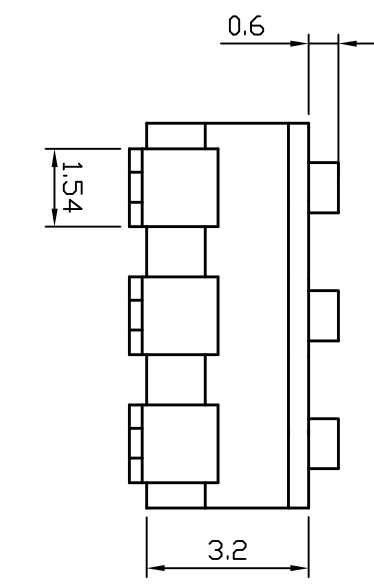


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao

1	2	3	4	5	6	7	8	9	10
Poles(N)	A(mm)								
01	2.54								
02	5.08								
03	7.62								
04	10.16								
05	12.70								
06	15.24								
07	17.78								
08	20.32								
09	22.86								
10	25.40								
12	30.48								

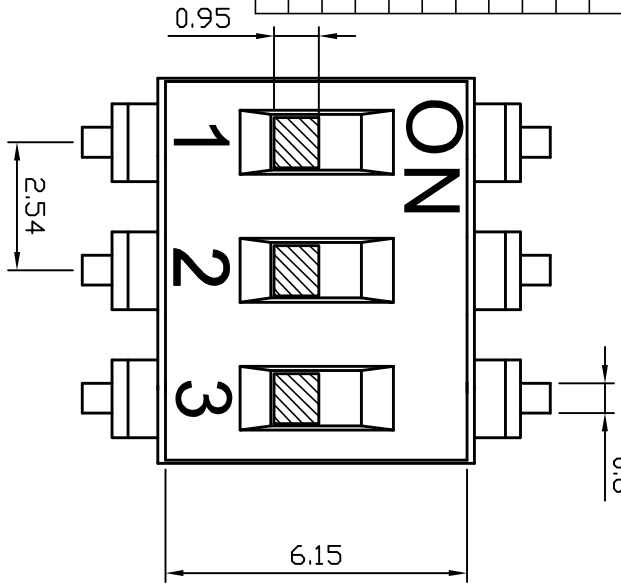

CIRCUIT

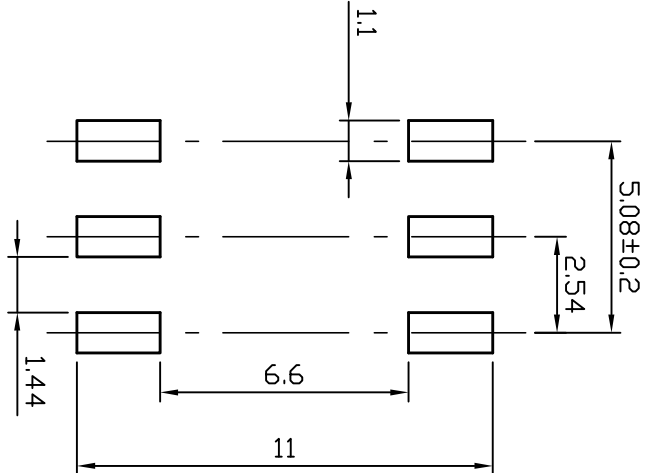

P.C.B LAYOUT

SPECIFICATIONS:

Operating temperature range: -30°C to +85°C
Rating: 25mA, 24V DC Max
Insulation resistance: 100MΩ min, 500V DC
Dielectric strength: 500V AC for 1min
Contact resistance: 100mΩ Max
Life: 1,000 Cycles
Operating force: 1000gf Max



RÖHS COMPLIANT Pb-Free RoHS Compliant				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	DIP Switch
UNLESS OTHERWISE STATED				WYJ	2025. 07. 25		
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	DHM50-DTS-03L-X
X.XX	±0.15	REV	A				
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3
△	±2°	SCALE	5:1			PRINT DATE	2025.07.26