
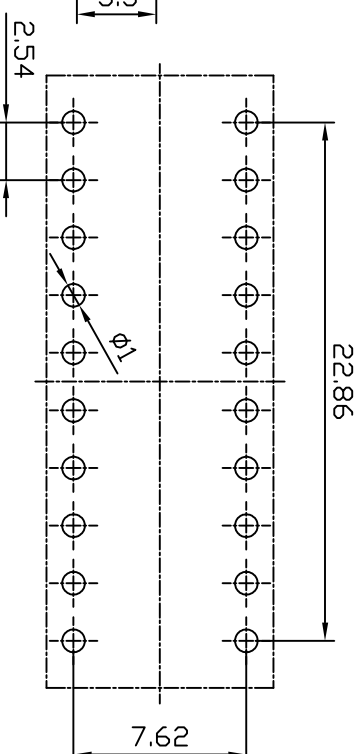
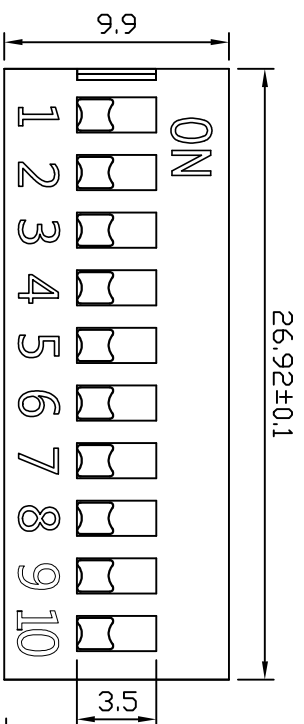
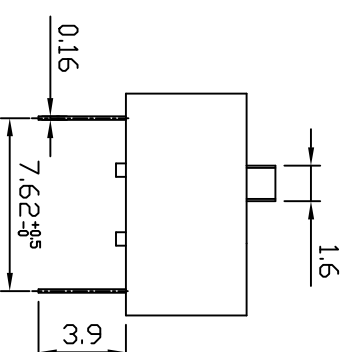


本公司智慧財產未經許可不得复制

SPECIFICATIONS:

Operating temperature range: -40°C to $+85^{\circ}\text{C}$
 Rating: 100mA, 50V DC Max
 Insulation resistance: 100M Ω min. 500V DC
 Dielectric strength: 500V AC for 1min
 Contact resistance: 100m Ω Max
 Life: 3,000 Cycles
 Operating force: 200gf Max

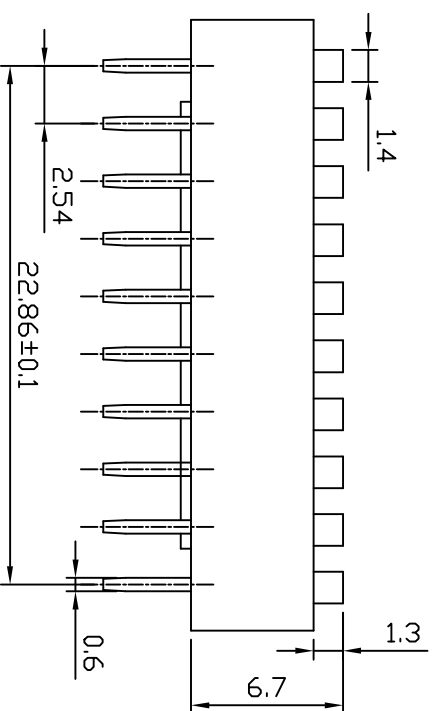

RÖHS COMPLIANT Pb-Free Hf						 东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	DIP Switch		
UNLESS OTHERWISE STATED				WJQ	2024. 06. 06				
XX	±0.20	SIZE	A4	CHKD	DATE	MODEL	DHT10-DS-10		
X.XX	±0.15	REV	A						
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3		
∠	±2°	SCALE	3:1			PRINT DATE	2025.05.08		