

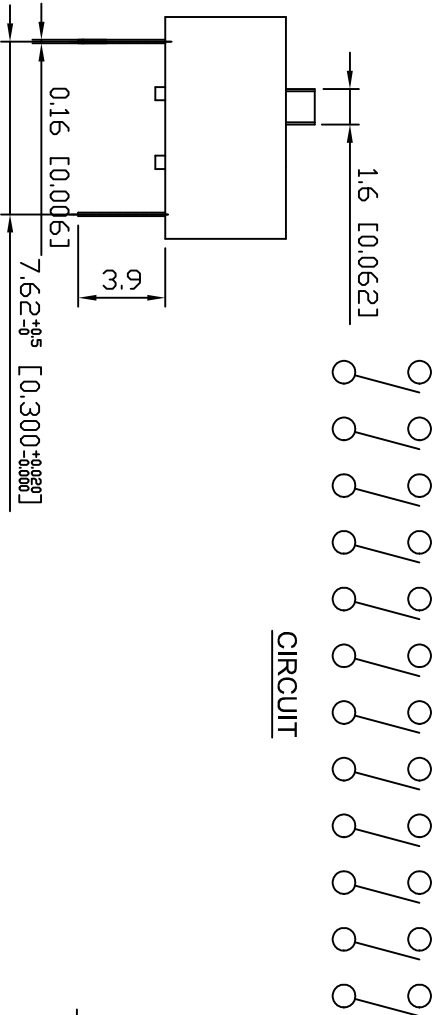
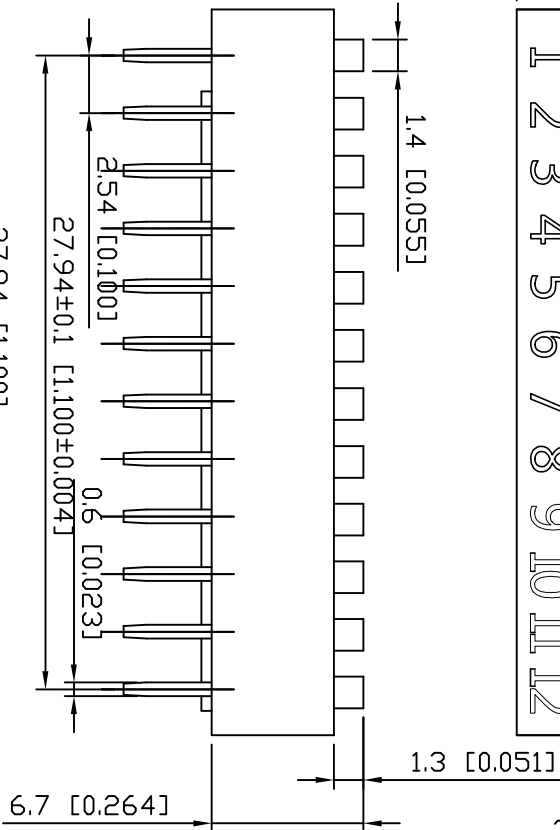
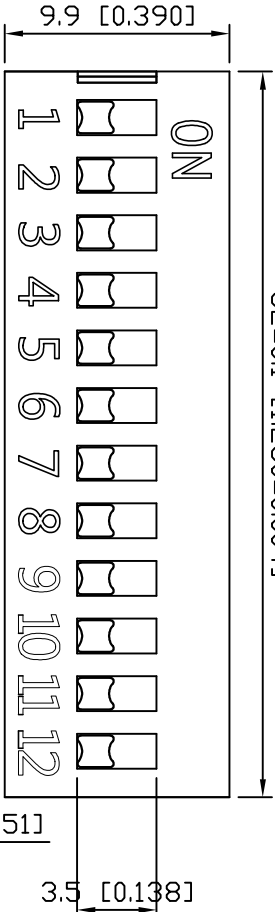


本公司智慧财产未经许可不得复制
ming biao copy/right may not be used without permission from ming biao.

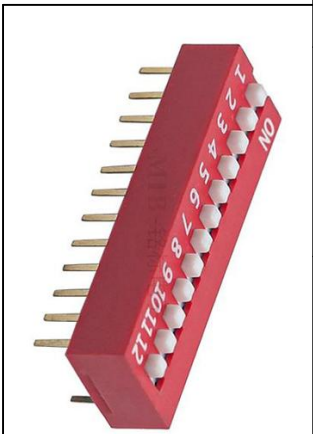

SPECIFICATIONS:

Operating temperature range: -40°C to +85°C
Rating: 100mA, 50V DC Max
Insulation resistance: 100MΩ min, 500V DC
Dielectric strength: 500V AC for 1min
Contact resistance: 100mΩ Max
Life: 3,000 Cycles
Operating force: 200gf Max

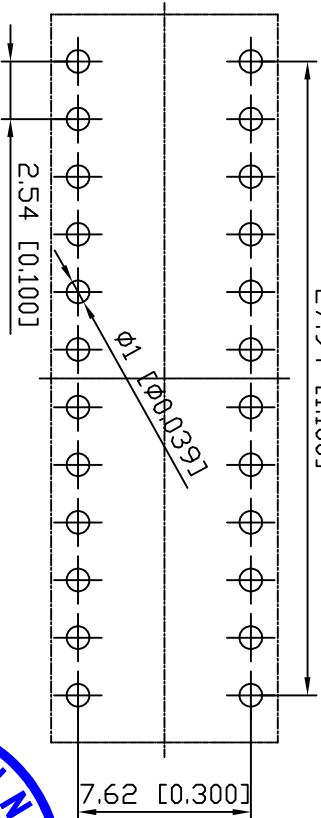

P.C.B LAYOUT



Rohs COMPLIANT Pb-free RoHS Free				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	DIP Switch
UNLESS OTHERWISE STATED				WYJ	2024. 06. 06		
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	DHT10-DS-12
X.XX	±0.15	REV	A				
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3
△	±2°	SCALE	3:1		PRINT DATE	2025.05.08	