
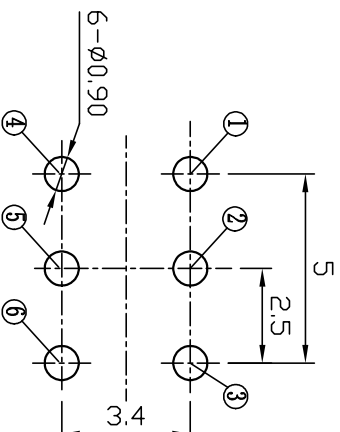
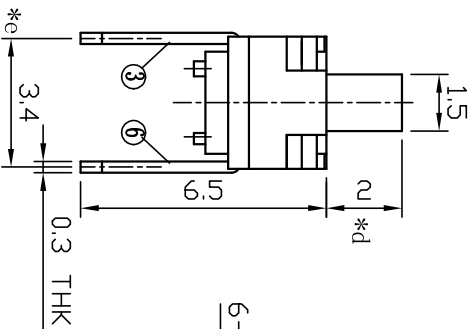
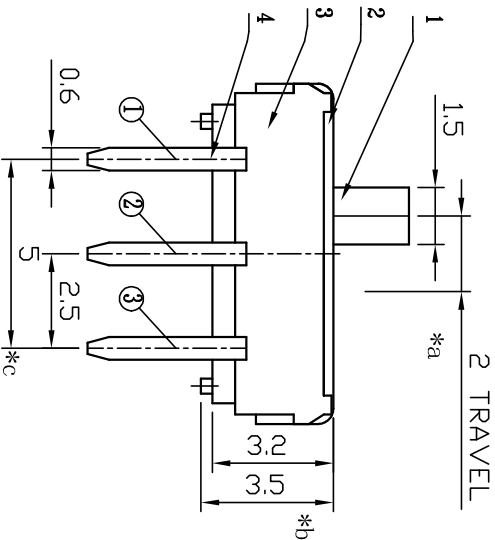


1		2		3		4		5		6		7		8		9		10	
5	CONTACT	PBS WIRE	2	Ag PLATED															
4	TERMINAL	BRASS STRIP	6	Ag PLATED															
3	CASE	PPA	1	BLACK															
2	COVER	SUS	1	NATURAL															
1	KNOB	PPA	1	BLACK															
NO.		PARTS	MATERIALS		Q'TY		FINISH												

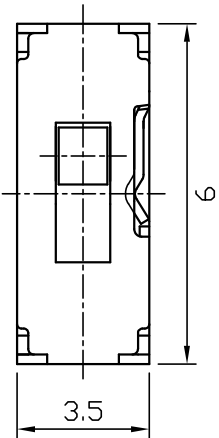

P.C.B LAYOUT


注: "*"表示关键尺寸(5个).

SPECIFICATIONS:

Operating temperature range: -10℃to+60℃
Rating: 0.3A, 6V DC Max
Insulation resistance: 100MΩ min., 500V DC
Dielectric strength: 500V AC for 1Min
Contact resistance: 70mΩ Max
Life: 5,000 Cycles
Travel: 2.0mm
Operating force: 200±80gf



本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

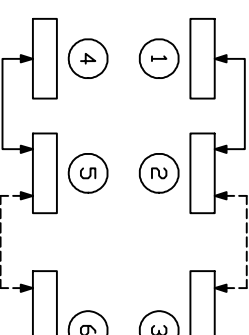

CIRCUIT

RÖHS COMPLIANT Pb-free RoHS Compliant				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	MINI SLIDE SWITCH
UNLESS OTHERWISE STATED				CHKD	2024. 08. 28	MODEL	MS22D16G2-B 弹线
X.X	±0.20	SIZE	A4		DATE		
X.XX	±0.15	REV	A				
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/1
△	±2°	SCALE	5:1			PRINT DATE	2025.06.12