

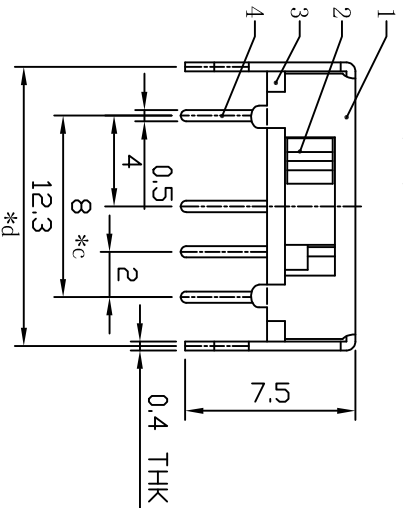

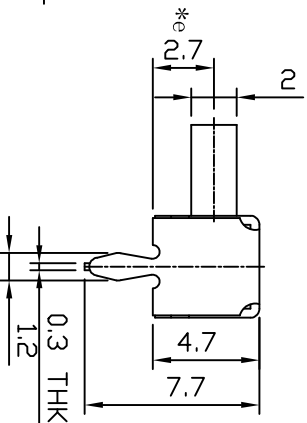



1		2	3	4	5
6	SPRING PLATE	PBS STRIP	1	NATURAL	
5	CONTACT CLIP	PBS C5210R-EH	1	Ag CLAD	
4	TERMINAL	BRASS STRIP	4	Ag PLATED	
3	BASE	PHENOLIC RESIN	1	NATURAL	
2	KNOB	PA66	1	BLACK	
1	FRAME	STEEL STRIP	1	Ni PLATED	
NO.	PARTS	MATERIALS	Q'TY	FINISH	

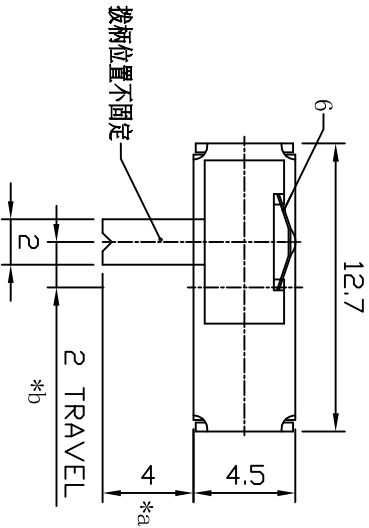

本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

SPECIFICATIONS:

Operating temperature range: -16°C to +60°C
Rating: 0.3A, 50V DC Max
Insulation resistance: 100M Ω min, 500V DC
Dielectric strength: 500V AC for 1min
Contact resistance: 50m Ω Max
Life: 10,000 Cycles
Travel: 2.0mm
Operating force: 250 $\pm$ 100gf



RÖHS COMPLIANT Pb-Free RoHS Compliant				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	
UNLESS OTHERWISE STATED				WYJ	2024.08.30	HORIZONTAL SLIDE SWITCH	
X.X	± 0.20	SIZE	A4	CHKD	DATE	MODEL	SK13D01VG4-NF-Cs
X.XX	± 0.15	REV	A				
X.XXX	± 0.10	UNIT	mm	APPD	DATE	SHEET	1/1
$\angle$	$\pm 2^\circ$	SCALE	3:1			PRINT DATE	2025.06.17