NO.	PARTS	MATERIALS	Q'TY	FINISH
6	SPRING PLATED	PBS STRIP	2	NATURAL
5	CONTACT CLIP	PBS C5210R-EH	1	Ag CLAD
4	TERMINAL	BRASS STRIP	5	Ag PLATED
3	BASE	PHENOLIC RESIN	1	NATURAL
2	FRAME	STEEL STRIP	1	Ni PLATED
1	KNOB	PA66	1	BLACK

本公司智慧财产未经许可不得复制
ming biao copyright,may not be used without permission from ming biao.

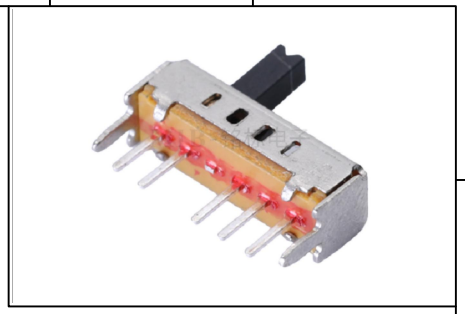

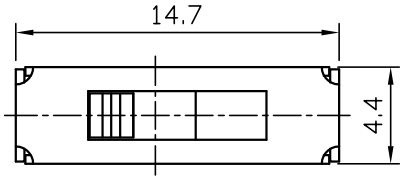





CIRCUIT

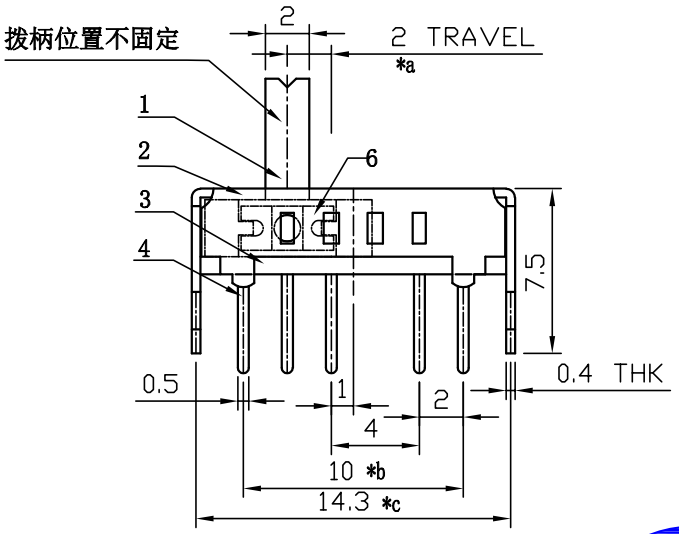

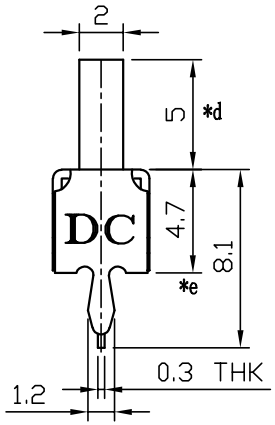

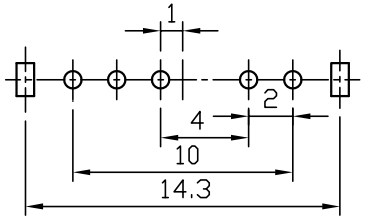

P.C.B LAYOUT

注： "*"表示关键尺寸(5个).

SPECIFICATIONS:

Operating temperature range:-16℃to+60℃
Rating:0.3A.50V DC Max
Insulation resistance:100MΩ min.500V DC
Dielectric strength:500V AC for 1Min
Contact resistance:50mΩ Max
Life:10,000 Cycles
Travel:2.0mm
Operating force:250/300/350±100gf

MING BIAO 铭标 2024.09.03 ISSUED R&D DEPT

RoHS COMPLIANT Pb Pb-Free Halogen Free

东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co. ,Ltd.

TOLERANCE UNLESS OTHERWISE STATED			
X.X	±0.20	SIZE	A4
X.XX	±0.15	REV	A
X.XXX	±0.10	UNIT	mm
∠	±2°	SCALE	3:1

DESIGN	DATE 2024. 09. 03	TITLE	VERTICAL SLIDE SWITCH
CHKD	DATE	MODEL	SS14D02VG5-NF-Cs-II-DC
APPD	DATE	SHEET	1/1
		PRINT DATE	2025.02.12