

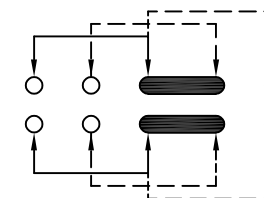
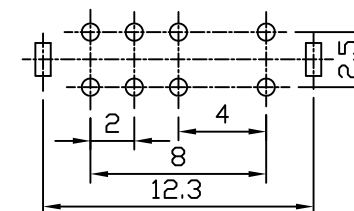
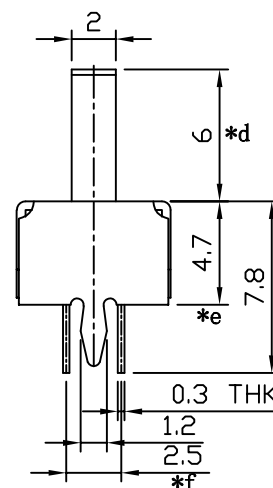


1		2		3		4		5	
6	SPRING PLATE	PBS STRIP				2	NATURAL		
5	CONTACT CLIP	PBS C5210R-EH				2	Ag CLAD		
4	TERMINAL	BRASS STRIP				8	Ag PLATED		
3	BASE	PHENOLIC RESIN				1	NATURAL		
2	FRAME	STEEL STRIP				1	Ni PLATED		
1	KNOB	PA66				1	BLACK		
NO.	PARTS	MATERIALS				Q' TY	FINISH		

本公司智慧财产未经许可不得复制
ming biao copyright, may not be used without permission from ming biao.



CIRCUIT

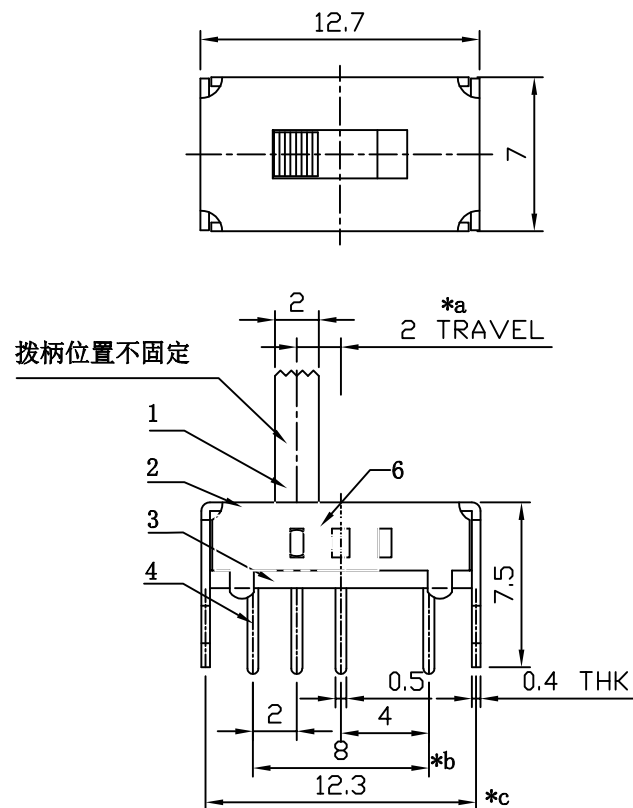

P.C.B LAYOUT

注：“*”表示关键尺寸(6个).

SPECIFICATIONS:

Operating temperature range:-16°Cto+60°C
Rating:0.3A.50V DC Max
Insulation resistance:100M Ω min.500V DC
Dielectric strength:500V AC for 1Min
Contact resistance:50m Ω Max
Life:10,000 Cycles
Travel:2.0mm
Operating force:300 $\pm$ 100gf



  				 东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.				
TOLERANCE				DESIGN	DATE	TITLE	VERTICAL SLIDE SWITCH	
UNLESS OTHERWISE STATED				WYJ	2024. 09. 03			
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	SS23D06G6-NF-Cs-I	
X.XX	±0.15	REV	A					
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/1	
	±2°	SCALE	3:1			PRINT DATE	2025.02.12	

