







1	2	3	4	5
6 SPRING PLATE	PBS STRIP		1 NATURAL	
5 CONTACT CLIP	PBS STRIP		2 Ag PLATED	
4 TERMINAL	BRASS STRIP		8 Ag PLATED	
3 BASE	PHENOLIC RESIN		1 NATURAL	
2 FRAME	STEEL STRIP		1 Ni PLATED	
1 KNOB	POM		1 BLACK	
NO.	PARTS	MATERIALS	Q'TY	FINISH

本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

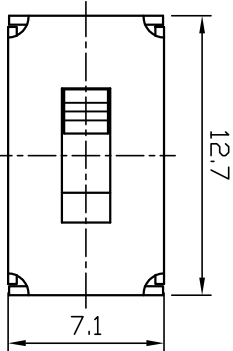

CIRCUIT

拨柄位置不固定

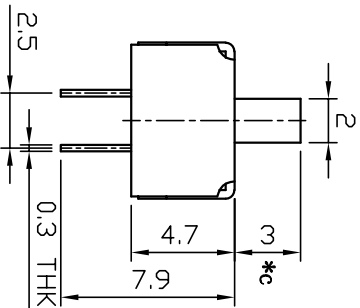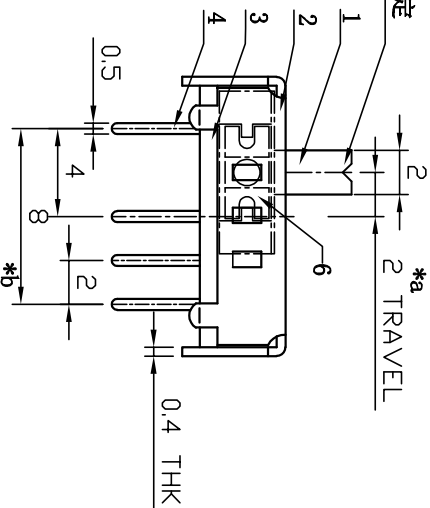

P.C.B LAYOUT

注：“*”表示关键尺寸(4个)

SPECIFICATIONS:

Operating temperature range: -16℃to+60℃
Rating: 0.3A, 50V DC Max
Insulation resistance: 100MΩ min, 500V DC
Dielectric strength: 500V AC for 1min
Contact resistance: 100mΩ Max
Life: 10, 000 Cycles
Travel: 2.0mm
Operating force: 250±100gf



R&D COMPLIANT		RoHS Pb-Free		HS RoHS		东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.	
TOLERANCE		DESIGN		TITLE		VERTICAL SLIDE SWITCH	
UNLESS OTHERWISE STATED		DATE		DATE		DATE	
XX		±0.20		SIZE		A4	
X.XX		±0.15		REV		A	
X.XXX		±0.10		UNIT		mm	
✓		±2°		SCALE		3:1	
APPD		DATE		MODEL		SS23D07V/G3	
SHEET		PRINT DATE		1/1		2025.02.12	
PRINT DATE		2025.02.12		2025.02.12		2025.02.12	