

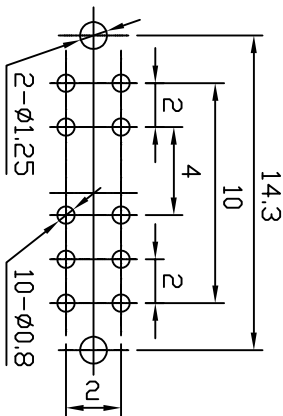




	1	2	3	4	5	6	7	8	9	10
A	6 SPRING PLATE	PBS STRIP	2	NATURAL						
	5 CONTACT CLIP	PBS C5210R-EH	2	Ag CLAD						
	4 TERMINAL	BRASS STRIP	10	Ag PLATED						
	3 BASE	PHENOLIC RESIN	1	NATURAL						
	2 FRAME	STEEL STRIP	1	Ni PLATED						
	1 KNOB	PA66	1	BLACK						
	NO.	PARTS	MATERIALS	Q'TY						

本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

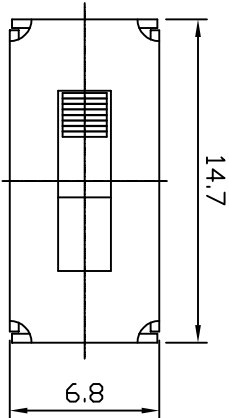

P.C.B LAYOUT

CIRCUIT

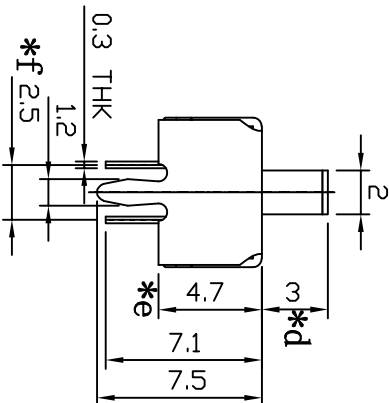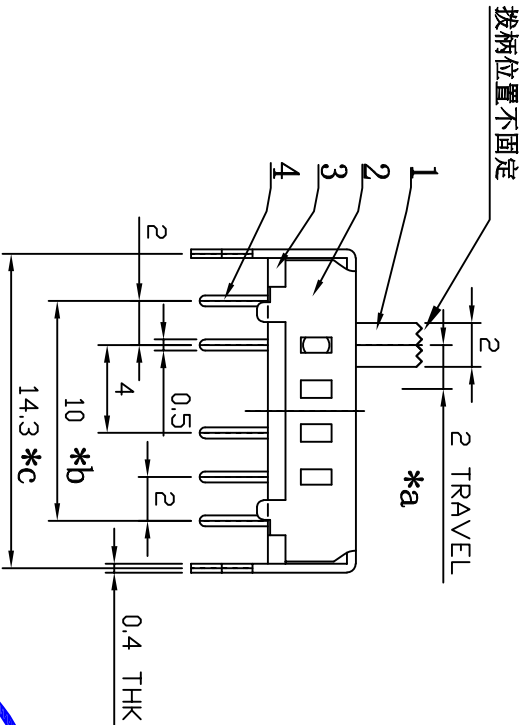

SPECIFICATIONS:

Operating temperature range:-20℃to+70℃
Rating:0.3A, 50V DC Max
Insulation resistance:100MΩ min, 500V DC
Dielectric strength:500V AC for 1Min
Contact resistance:50mΩ Max
Life:10,000 Cycles
Travel:2.0mm
Operating force:300±100gf

注：“*”表示关键尺寸(6个).



R&D COMPLIANT Pb-Free RoHS				Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	VERTICAL SLIDE SWITCH
UNLESS OTHERWISE STATED				WYJ	2024.09.03		
XX	±0.20	SIZE	A4	CHKD	DATE	MODEL	SS24D07G3-NF-Cs-II
XXX	±0.15	REV	A				
X,XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/1
±	±2°	SCALE	2:1			PRINT DATE	2025.02.12